




Engineering Services

Updated April 3, 2020

County Road 108 Safety Improvements Middle Road to US 17

Project Photo

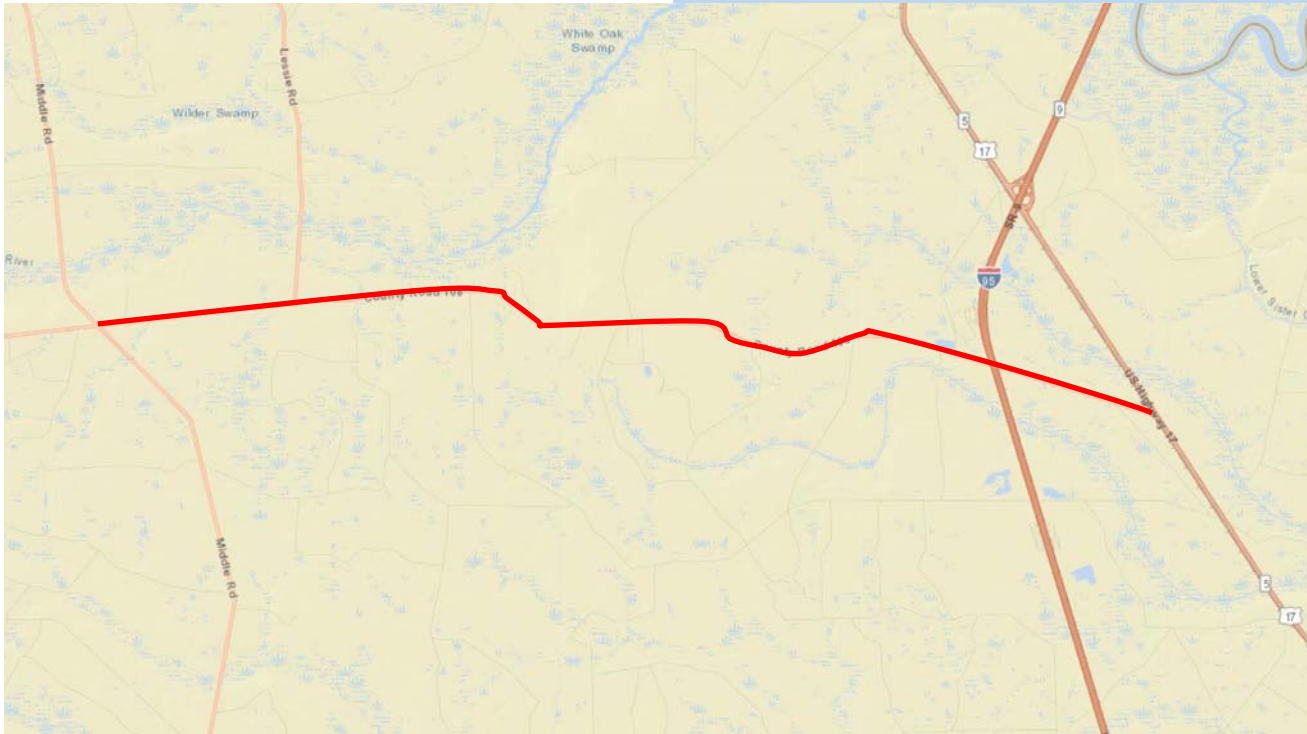

Current Status:

- Design completed in December 2019
- Construction invitation to bid April 2020
- Construction to begin in Fall 2020

Project Team Members:

Engineering Firm: Element Engineering

Contractor: TBD

Construction Engineering Inspection: TBD

Project Manager: Robert T. Companion, PE

Project

Project Limits:

- From Middle Road to US 17 (9.5 miles)

Project Goals:

- Mill and Overlay roadway surface
- Improve signage and striping
- Improve geometry of multiple curves

Construction Activities:

- Mill existing surface and overlay with new pavement
- Improve signage and placement
- Build up superelevation on curves to meet latest standards.